


## Metric DIN 1 Taper Pins

Visit our [online store](#) for product availability

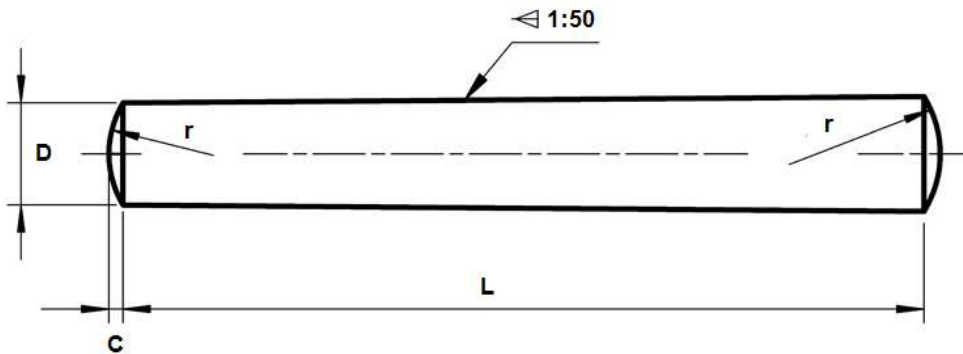

D	2	3	4	5	6	8	10	12	16	20
C max	0.30	0.45	0.60	0.75	0.90	1.20	1.50	1.80	2.50	3.00
r	2.00	3.00	4.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00

All measurements are in mm

Metric DIN 1 taper pins solid steel rods that tapers through the length to a smaller diameter at one end. Standard inch-sized taper pins have a taper on diameter of 1:48 while DIN 1 metric taper pins have a taper of 1:50. The length of a taper pin excludes the slightly convex ends. The diameter of a taper pin is measured at the large end for inch standard (imperial) and at the narrow end for metric DIN 1 taper pins. Taper pins are used to secure two objects together. Because of their wedge shape, taper pins are self-locking in that the further it is inserted, the tighter the connection. As they are seated a friction force develops along the whole length and diameter of the pin which locks the pin in place. Aspen Fasteners offers over 500,000 unique fastener products from stock in inch and metric standard in a variety of materials and finishes. The following sizes of DIN 1 taper pins are available for immediate shipping from stock: Diameters ranging from M1.5 to M20 up to 120mm long in steel and stainless steel A1 and marine grade 316 stainless steel.. View parts by clicking on the following link: [Metric DIN 1 Taper Pins](#) or contact our knowledgeable and friendly sales staff for more information and/or an immediate quote.

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA  
[www.aspenfasteners.com](http://www.aspenfasteners.com) | [aspensales@aspenfasteners.com](mailto:aspensales@aspenfasteners.com) | 1-800-479-0056

DIN (Deutsches Institut für Normung - German Institute for Standardization) standards are issued for a variety of components including industrial fasteners as Metric DIN 1 taper pins. The DIN standards are commonly used in Germany, Europe and globally even though the transition to ISO standards is gradually taking place. DIN standards continue to be used for parts which do not have ISO equivalents. The ISO equivalent for DIN 1 taper pins is ISO 2339.

**1) Mechanical properties of stainless steel for metric DIN 1 taper pins**

Stainless steels can be divided into three groups: austenitic, ferritic and martensitic. Austenitic steel is by far the most common type (>90% of commercial fasteners). The steel groups and strength classes are designated by a four-digit sequence of letters and numbers (eg A2-70) as shown in the following table. DIN EN ISO 3506 governs screws and nuts made from stainless steel.

Steel group	Steel grade	Strength class	Screws, Nuts and Bolts			
			Tensile strength N/mm2	Tensile strength PSI	Dia range	Nut Load N/mm2
	A1, A2 & A4	50	500	70,000	<=M39	500
		70	700	100,000	<=M20	700
		80	800	118,000	<=M20	800

The tensile stress is calculated with reference to the tensile stress area (see DIN EN ISO 3506-1979). Nuts to be paired with same grade of stainless steel screws



All your fastener needs from a single source

Steel group	Property Strength class	Made From	Characteristics
Austenitic	50	A1, A2	Soft; cold worked, turned and soft pressed fasteners 70,000 PSI 500 N/mm2 <=M39
	70	A2, A4	Cold worked, normal strength, formed fasteners 100,000 PSI 700 N/mm2 <=M20
	80	A2, A4	Extreme cold worked, high strength fasteners 118,000 PSI 800 N/mm2 <=M20

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA  
[www.aspenfasteners.com](http://www.aspenfasteners.com) | [aspensales@aspenfasteners.com](mailto:aspensales@aspenfasteners.com) | 1-800-479-0056

Headquarters: Independence OH USA; Montreal QC Canada;  
 Distribution Centers: Boston MA; Chicago IL; Cincinnati KY; Dallas TX; Denver CO; Houston TX; Jersey City NJ; Los Angeles CA; Miami FL;  
 San Francisco CA; Seattle WA; Washington VA; Toronto ON; Calgary AB; Vancouver BC; Jiutepec (Temixco); Mexico City; Monterrey

2) Chemical composition of stainless steel metric DIN 1 taper pins

Grade	USA Grade	Material designation	Material no.	C %	Si ≤ %	Mn ≤ %	Cr ≤ %	Mo ≤ %	Ni ≤ %
A1	303	X 10Cr Ni S 189	1.4305	0.12	1	2	17 to 19	0.6	8 to 10
A 2	304	X 5Cr Ni 1810	1.4301	≤ 0.07	1	1	17.5 to 19.5	-	8 to 10.5
		X 2 Cr Ni 1811	1.4306	≤ 0.03	1	2	18 to 20	-	10 to 12
		X 8 Cr Ni 19/10	1.4303	≤ 0.07	1	2	17 to 19	-	11 to 13
A 4	316	X 5 Cr Ni Mo 1712	1.4401	≤ 0.07	1	2	16.5 to 18.5	2 to 2.5	10 to 13
		X 2 Cr Ni Mo 1712	1.4404	≤ 0.03	1	2	16.5 to 18.5	2 to 2.5	10 to 13

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA  
[www.aspenfasteners.com](http://www.aspenfasteners.com) | [aspensales@aspenfasteners.com](mailto:aspensales@aspenfasteners.com) | 1-800-479-0056

Headquarters: Independence OH USA; Montreal QC Canada;  
 Distribution Centers: Boston MA; Chicago IL; Cincinnati KY; Dallas TX; Denver CO; Houston TX; Jersey City NJ; Los Angeles CA; Miami FL;  
 San Francisco CA; Seattle WA; Washington VA; Toronto ON; Calgary AB; Vancouver BC; Jiutepec (Temixco); Mexico City; Monterrey

3) Chemical composition of steel metric DIN 1 taper pins

PROPERTY CLASS	MATERIAL AND TREATMENT	CHEMICAL COMPOSITION LIMITS %				TEMPERING TEMP °C MIN.
		C		P	S	
		min.	max.	max.	max.	
4.6, 4.8, 5.8, 6.8	Low or medium carbon steel	-	0.55	0.05	0.06	-
8.8	Medium carbon steel quenched, tempered	0.25	0.55	0.04	0.05	425
9.8	Medium carbon steel quenched, tempered	0.25	0.55	0.04	0.05	425
10.9	Medium carbon steel additives e.g. boron, Mn, Cr or Alloy steel - quenched, tempered	0.2	0.55	0.04	0.05	425
12.9	Alloy steel - quenched, tempered	0.2	0.5	0.035	0.035	380

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA  
[www.aspenfasteners.com](http://www.aspenfasteners.com) | [aspensales@aspenfasteners.com](mailto:aspensales@aspenfasteners.com) | 1-800-479-0056

Headquarters: Independence OH USA; Montreal QC Canada;  
 Distribution Centers: Boston MA; Chicago IL; Cincinnati KY; Dallas TX; Denver CO; Houston TX; Jersey City NJ; Los Angeles CA; Miami FL; San Francisco CA; Seattle WA; Washington VA; Toronto ON; Calgary AB; Vancouver BC; Jiutepec (Temixco); Mexico City; Monterrey

4) Mechanical properties of steel for metric DIN 1 taper pins

MECHANICAL PROPERTY		PROPERTY CLASS								
		4.8	5.6	5.8	6.8	8.8		9.8	10.9	12.9
						≤ M16	> M16			
Tensile Strength (Rm, N/mm <sup>2</sup> )	nom.	400	500		600	800		900	1000	1200
	min.	420	500	520	600	800	830	900	1040	1220
Vickers Hardness	min.	130	155	160	190	250	255	290	320	385
	max	250				320	336	360	380	435
Brinell Hardness	min.	124	147	152	181	319	242	266	295	353
	max.	238				385	319	342	363	412
Rockwell Hardness	min. HR	71	79	82	89	-				
	HRC	-	-	-	-	20	23	28	32	39
	HR	95			99	-				
	max. HRC	-	-	-	-	32	34	37	39	44
Yield Stress ReL. N/mm <sup>2</sup>	nom.	320	300	400	480	-				
	min.	340	300	420	480	-				
Stress at permanent set limit N/mm <sup>2</sup>	nom.	-				640		720	900	1080
	min.	-				640	660	720	940	1100

Disclaimer

Dimensional data and technical information for Metric DIN 1 taper pins was obtained from publicly available sources and not acquired through standards agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Aspen Fasteners makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standards authorities for accurate and detailed information.