


## Metric DIN 571 Hex Head Lag Screw Bolts

Visit our [online store](#) for product availability

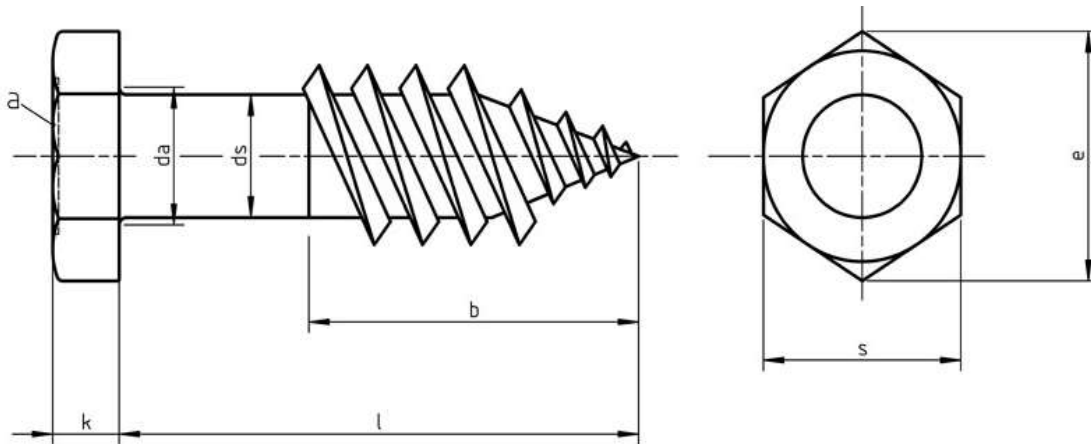

$$b \geq 0.6 \times \text{length } (l)$$

### Dimensions of Metric DIN 571 hex head lag screw bolts

Thread size	4	5	6	(7)	8	10	12	16	20	
$d_s$	max. = nominal size	4	5	6	7	8	10	12	16	20
	min.	3,52	4,52	5,52	6,42	7,42	9,42	11,3	15,3	19,3
$d_a$	max.	5	6	7,2	8,2	10,2	12,2	15,2	19,2	24,4
	Nominal size	2,8	3,5	4	5	5,5	7	8	10	13
$k$	max.	3,1	3,88	4,38	5,38	5,88	7,45	8,45	10,45	13,90
	min.	2,5	3,13	3,63	4,63	5,13	6,55	7,55	9,55	12,1
$s$	Nominal size	7	8	10	12	13	17	19	24	30
	max.	7	8	10	12	13	17	19	24	30
$e$	min.	6,64	7,64	9,64	11,57	12,57	16,57	18,48	23,16	29,16
	min.	7,50	8,63	10,89	13,07	14,2	18,72	20,88	26,17	32,95

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA  
[www.aspenfasteners.com](http://www.aspenfasteners.com) | [aspensales@aspenfasteners.com](mailto:aspensales@aspenfasteners.com) | 1-800-479-0056

Headquarters: Independence OH USA; Montreal QC Canada;

Distribution Centers: Boston MA; Chicago IL; Cincinnati KY; Dallas TX; Denver CO; Houston TX; Jersey City NJ; Los Angeles CA; Miami FL;  
 San Francisco CA; Seattle WA; Washington VA; Toronto ON; Calgary AB; Vancouver BC; Jiutepec (Temixco); Mexico City; Monterrey

1) Weight metric DIN 571 hex head lag screw bolts

Nominal size	l		Mass (7,85 kg/dm <sup>3</sup> ), in kg per 1000 units, approximately								
	min.	max.									
16	15,1	16,9	1,71	2,92							
20	18,95	21,05	2,01	3,42	5,02						
25	23,95	26,05	2,41	4,02	5,82		11,5				
30	28,95	31,05	2,81	4,62	6,62		12,9	23,6			
35	33,75	36,25	3,11	5,12	7,42		14,2	25,8	36,2		
40	38,75	41,25	3,51	5,82	8,22		15,6	28,0	39,2		
45	43,75	46,25		6,43	8,94		16,9	30,0	42,1		
50	48,75	51,25		7,03	9,64		18,2	32,1	45,4	84,1	
55	53,5	56,5			10,5		19,6	34,3	48,6	89,7	
60	58,5	61,5			11,2		20,9	36,5	51,8	94,9	165
65	63,5	66,5					22,2	38,5	54,7	99,5	174
70	68,5	71,5					23,6	40,7	57,8	107	182
75	73,5	76,5					25,0	42,9	61,0	112	192
80	78,5	81,5					26,5	45,2	64,5	118	201
90	88,25	91,75					29,4	49,9	71,0	130	220
100	98,25	101,75					32,0	54,0	77,1	141	238
110	108,25	111,75							83,4	152	253
120	118,25	121,75							89,5	163	275
130	128,0	132,0								175	293
140	138,0	142,0								187	317
150	148,0	152,0								198	328
160	158,0	162,0								209	348
170	168,0	172,0									366
180	178,0	182,0									385
190	187,7	192,3									404
200	197,7	202,3									421

Metric DIN 571 hex head lag screw bolts are heavy duty wood screws usually used to attach lumber to lumber or lumber to masonry. Commonly used in deck and dock construction. Pre-drilling is recommended to prevent splitting. They are generally much larger in size than standard wood screws. Aspen Fasteners offers the following sizes for immediate delivery from stock: Diameters ranging from M5 to M16 and up to 300mm long. View available parts by clicking on the following link: [metric DIN 571 hex head lag screw bolts](#)

DIN (Deutsches Institut für Normung - German Institute for Standardization) standards are issued for a variety of components including industrial fasteners as metric DIN 571 hex head lag screw bolts. The DIN standards remain common in Germany, Europe and globally even though the transition to ISO standards is taking place. DIN standards continue to be used for parts which do not have ISO equivalents or for which there is no need for standardization.

### 1) Mechanical properties of stainless steel for metric DIN 571 hex head lag screw bolts

Stainless steels can be divided into three groups of steel - austenitic, ferritic and martensitic. Austenitic steel is by far the most common type (>90% of commercial fasteners). The steel groups and strength classes are designated by a four-digit sequence of letters and numbers (eg A2-70) as shown in the following table. DIN EN ISO 3506 governs screws and nuts made from stainless steel.

Steel group	Steel grade	Strength class	Screws, Nuts and Bolts			
			Tensile strength N/mm <sup>2</sup>	Tensile strength PSI	Dia range	Nut Load N/mm <sup>2</sup>
Austenitic	A2 and A4	50	500	70,000	<=M39	500
		70	700	100,000	<=M20	700
		80	800	118,000	<=M20	800

The tensile stress is calculated with reference to the tensile stress area (see DIN EN ISO 3506-1979). Nuts to be paired with same grade of stainless steel screws

Steel group	Property Strength class	Made From	Characteristics
Austenitic	50	A1, A2	Soft; cold worked, turned and soft pressed fasteners
	70	A2, A4	Cold worked, normal strength formed fasteners
	80	A2, A4	Extreme cold worked, high strength, special applications

## 2) Chemical composition of stainless steel metric DIN 571 hex head lag screw bolts

Grade	USA Grade	Material designation	Material no.	C %	Si ≤ %	Mn ≤ %	Cr %	Mo %	Ni %
<b>A 2</b>	<b>304</b>	X 5Cr Ni 1810	1.4301	≤ 0.07	1.0	2.0	17.5 to 19.5	-	8.0 to 10.5
		X 2 Cr Ni 1811	1.4306	≤ 0.03	1.0	2.0	18.0 to 20.0	-	10 to 12.0
		X 8 Cr Ni 19/10	1.4303	≤ 0.07	1.0	2.0	17.0 to 19.0	-	11.0 to 13.0
<b>A 4</b>	<b>316</b>	X 5 Cr Ni Mo 1712	1.4401	≤ 0.07	1.0	2.0	16.5 to 18.5	2.0 to 2.5	10.0 to 13.0
		X 2 Cr Ni Mo 1712	1.4404	≤ 0.03	1.0	2.0	16.5 to 18.5	2.0 to 2.5	10 to 13

## 3) Chemical composition of steel metric DIN 571 hex head lag screw bolts

PROPERTY CLASS	MATERIAL AND TREATMENT	CHEMICAL COMPOSITION LIMITS %				TEMPERING TEMP °C MIN.
		C		P	S	
		min.	max.	max.	max.	
4.6, 4.8, 5.8, 6.8	Low or medium carbon steel	-	0.55	0.05	0.06	-
8.8	Medium carbon steel quenched, tempered	0.25	0.55	0.04	0.05	425
9.8	Medium carbon steel quenched, tempered	0.25	0.55	0.04	0.05	425
10.9	Medium carbon steel additives e.g. boron, Mn, Cr or Alloy steel - quenched, tempered	0.20	0.55	0.04	0.05	425
12.9	Alloy steel - quenched, tempered	0.20	0.50	0.035	0.035	380

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA  
[www.aspenfasteners.com](http://www.aspenfasteners.com) | [aspensales@aspenfasteners.com](mailto:aspensales@aspenfasteners.com) | 1-800-479-0056

Headquarters: Independence OH USA; Montreal QC Canada;  
 Distribution Centers: Boston MA; Chicago IL; Cincinnati KY; Dallas TX; Denver CO; Houston TX; Jersey City NJ; Los Angeles CA; Miami FL;  
 San Francisco CA; Seattle WA; Washington VA; Toronto ON; Calgary AB; Vancouver BC; Jiutepec (Temixco); Mexico City; Monterrey

**4) Mechanical properties of steel for metric DIN 571 hex head lag screw bolts**

MECHANICAL PROPERTY		PROPERTY CLASS									
		4.8	5.6	5.8	6.8	8.8		9.8	10.9	12.9	
						Up to M 16	Over M 16				
Tensile Strength (Rm, N/mm <sup>2</sup> )	nom.	400	500		600	800		900	1000	1200	
	min.	420	500	520	600	800	830	900	1040	1220	
Vickers Hardness	min.	130	155	160	190	250	255	290	320	385	
	max.	250				320	336	360	380	435	
Brinell Hardness	min.	124	147	152	181	319	242	266	295	353	
	max.	238				385	319	342	363	412	
Rockwell Hardness	min. HR	71	79	82	89	-					
	HRC	-	-	-	-	20	23	28	32	39	
	HR	95				99	-				
	max. HRC	-	-	-	-	32	34	37	39	44	
Yield Stress ReL. N/mm <sup>2</sup>	nom.	320	300	400	480	-					
	min.	340	300	420	480	-					
Stress at permanent set limit N/mm <sup>2</sup>	nom.	-				640		720	900	1080	
	min.	-				640	660	720	940	1100	

**5) Metric DIN 571 hex head lag screw bolts available at Aspen Fasteners**

(click to view available sizes and prices)



**Steel**

**Disclaimer**

Dimensional data and technical information for metric DIN 571 hex head lag screw bolts was obtained from publicly available sources and not acquired through standards agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Aspen Fasteners makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standards authorities for accurate and detailed information.

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA  
[www.aspenfasteners.com](http://www.aspenfasteners.com) | [aspensales@aspenfasteners.com](mailto:aspensales@aspenfasteners.com) | 1-800-479-0056

**Headquarters:** Independence OH USA; Montreal QC Canada;  
**Distribution Centers:** Boston MA; Chicago IL; Cincinnati KY; Dallas TX; Denver CO; Houston TX; Jersey City NJ; Los Angeles CA; Miami FL; San Francisco CA; Seattle WA; Washington VA; Toronto ON; Calgary AB; Vancouver BC; Jiutepec (Temixco); Mexico City; Monterrey