


Product Dimensions and Weights

DIN 84 / ISO 1207 Specifications

Metric DIN 84 Slotted Cheese Head Machine Screws

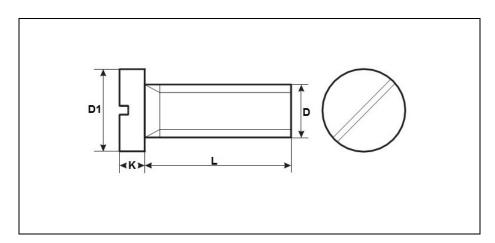

D	3	4	5	6	
D1	6	8	10	12	
K	1.8	2.4	3.0	3.6	
L (mm)	Wei	ght in kg(s) po	er 1000 pcs		
5	0.59	1.24	2.27		
8	0.68	1.39	2.52	4.02	
10	0.76	1.55	2.76	4.37	
12	0.85	1.70	3.00	4.72	
16	1.03	2.01	3.50	5.45	
20	1.21	2.32	4.00	6.14	
25	1.43	2.71	4.62	7.01	
30	1.65	3.10	5.24	7.90	
35	3.48	5.86	8.78		
40	3.87	6.48	9.66		
45	7.10	10.50			
50	7.72	11.40			

All measurements are in mm

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA www.aspenfasteners.com | aspensales@aspenfasteners.com | 1-800-479-0056



Metric DIN 84 is a slotted drive machine screw with a cheese head. Machine screws are externally threaded fasteners designed to be mated with threaded nuts or tapped holes in the parts they are designed to hold together. DIN 84 Slotted Cheese Head Machine Screws are fully threaded and can be used for many applications. Aspen Fasteners offers over 500,000 unique fastener products from stock in inch and metric standard in a variety of materials and finishes. The following sizes DIN 84 slotted cheese (pan) head machine screws are available for immediate shipping from stock: Diameters ranging from M1 to M10 and lengths up to 90mm long in steel and stainless steel A2 and A4. View parts by clicking on the following link: Metric DIN 84 Cheese Head Machine Screws

DIN (**D**eutsches **I**nstitut für **N**ormung - German Institute for Standardization) standards are issued for a variety of components including industrial fasteners as Metric DIN 84 Slotted Cheese (Pan) Head Machine Screws. The DIN standards remain common in Germany, Europe and globally even though the transition to ISO standards is taking place. DIN standards continue to be used for parts which do not have ISO equivalents or for which there is no need for standardization. The ISO equivalent DIN 84 Slotted Cheese Head Machine Screws is ISO 1207.

1) Mechanical properties of stainless steel for metric DIN 84 Slotted Cheese Head Machine Screws

Stainless steels can be divided into three groups of steel - austenitic, ferritic and martensitic. Austenitic steel is by far the most common type (>90% of commercial fasteners). The steel groups and strength classes are designated by a four-digit sequence of letters and numbers (eg A2-70) as shown in the following table. DIN EN ISO 3506 governs screws and nuts made from stainless steel.

			Screws, Nuts and Bolts						
Steel group	oup Steel grade Strength		Tensile strength N/mm ²	Tensile strength PSI	Dia range	Nut Load N/mm ²			
		50	500	70,000	<=M39	500			
Austenitic	A2 and A4	70	700	100,000	<=M20	700			
		80	800	118,000	<=M20	800			

The tensile stress is calculated with reference to the tensile stress area (see DIN EN ISO 3506-1979). Nuts to be paired

with same grade of stainless steel screws



Steel group	Property Strength class	Made From	Characteristics
	50	A1, A2	Soft; cold worked, turned and soft pressed fasteners
Austenitic	70	A2, A4	Cold worked, normal strength formed fasteners
	80	A2, A4	Extreme cold worked, high strength, special applications

2) Chemical composition of stainless steel metric DIN 84 Slotted Cheese Head Machine Screws

Grade	USA Grade	Material designation	Material no.	C %	Si ≤ %	Mn ≤ %	Cr %	Mo %	Ni %
	A 2 304	X 5Cr Ni 1810	1.4301	≤ 0.07	1.0	2.0	17.5 to 19.5	ı	8.0 to 10.5
A 2		X 2 Cr Ni 1811	1.4306	≤ 0.03	1.0	2.0	18.0 to 20.0	ı	10 to 12.0
		X 8 Cr Ni 19/10	1.4303	≤ 0.07	1.0	2.0	17.0 to 19.0	ı	11.0 to 13.0
A 4	A 4 316	X 5 Cr Ni Mo 1712	1.4401	≤ 0.07	1.0	2.0	16.5 to 18.5	2.0 to 2.5	10.0 to 13.0
7.7	310	X 2 Cr Ni Mo 1712	1.4404	≤ 0.03	1.0	2.0	16.5 to 18.5	2.0 to 2.5	10 to 13



3) Chemical composition of steel metric DIN 84 Slotted Cheese Head Machine Screws

PROPERTY CLASS		CHEM	ICAL COMP	TEMPERING		
	MATERIAL AND TREATMENT	С		Р	S	TEMPERING TEMP °C MIN.
		min.	max.	max.	max.	
4.6, 4.8, 5.8, 6.8	Low or medium carbon steel	- 0.55		0.05	0.06	-
8.8	Medium carbon steel quenched, tempered	0.25	0.25 0.55		0.05	425
9.8	Medium carbon steel quenched, tempered	0.25	0.55	0.04	0.05	425
10.9	Medium carbon steel additives e.g. boron, Mn, Cr or Alloy steel - quenched, tempered	0.20	0.55	0.04	0.05	425
12.9	Alloy steel - quenched, tempered	0.20	0.50	0.035	0.035	380

4) Mechanical properties of steel for metric DIN 84 Slotted Cheese Head Machine Screws

MECHANICAL PROPERTY		PROPERTY CLASS									
						8.8					
			4.8 5.6 5.8	6.8	Up to M 16	Over M 16	9.8	10.9	12.9		
Tensile Strength	Tensile Strenath nom.		400	5	000	600	8	00	900	1000	1200
(Rm, N/mm ²)	m	nin.	420	500	520	600	800	830	900	1040	1220
\/ialkanal.landmaaa	m	nin.	130	155	160	190	250	255	290	320	385
Vickers Hardness	max		250			320	336	360	380	435	
Drivell Lleveleses	m	nin.	124	147	152	181	319	242	266	295	353
Brinell Hardness	max.		238		385	319	342	363	412		
	min.	HR	71	79	82	89			-		
Rockwell Hardness		HRC	-	-	-	-	20	23	28	32	39
RockwellHalulless		HR	95			99	-				
	max.	HRC	-	-	-	-	32	34	37	39	44
Yield Stress ReL.	nom.		320	300	400	480	-				
N/mm²	min.		340	300	420	480	-				
Stress at permanent	nom.		-			6-	40	720	900	1080	
set limit N/mm²	min.		-			640	660	720	940	1100	

Aspen Fasteners 4807 Rockside Road, Suite 400, Independence, OH 44131 USA www.aspenfasteners.com | aspensales@aspenfasteners.com | 1-800-479-0056



Disclaimer

Dimensional data and technical information for Metric DIN 84 Slotted Cheese Head Machine Screws was obtained from publicly available sources and not acquired through standards agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Aspen Fasteners makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standards authorities for accurate and detailed information.